


Catalogue



Web

LINGLONG AMERICAS, INC.

Add:1484 Medina Road, Suite 118 Medina OH 44256

E-mail:linglong_sales@linglong.cn

Web:https://atlas-tires.com



TIRES
CATALOGUE
PASSENGER
CAR TIRE
ATLAS

CONTENTS

ALL SEASON / ALL WEATHER

FORCE UHP.....	17
FORCE HP.....	23
PARALLER 4X4 HP.....	25
PARALLER H/T.....	27
PARALLER A/T.....	29
PRIVA X/T.....	33
PRIVA R/T.....	35
PARALLER M/T.....	37
AT R781.....	39

**ATLAS
TIRRES**



COMPANY INTRODUCTION

ATLAS TIRE

PRIVA X/T

PRIVA R/T

FORCE UHP

”

Shandong Linglong Tyre Co., Ltd. is a technical tire manufacturer integrating tire design, development, manufacturing and sales.

Founded in 1975, the company has seven R&D centers, seven manufacturing bases across the world currently and over 17,783 employees, with its products widely used on passenger vehicles, commercial vehicles, and engineering machinery vehicles. It has built diversified brand system for different markets.

In the future, the company will fully implement its global layout, fully improve its core competitiveness, and strive to achieve its annual production and sales volume reaching 160 million units, sales revenue of over RMB 80 billion and production capacity among global top five tire manufacturers by 2030, becoming a technology-oriented enterprise with world-class technology, management and brand influence.

en.linglong.cn

BRAND VALUE

It strengthens the retail network construction, with nearly

200,000

Marketing outlets globally, promoting its brand reputation and customer loyalty through reliable product quality and excellent service.

The company's products are exported to 173 countries across the world, covering Europe, Middle East, Americas, Asia Pacific, and Africa, and provides OE service for over 100 manufacturing bases of 60 global well-known automakers.

Linglong's brand value reached

98.137

Billion RMB in 2024

Linglong has sponsored over

100

Sports events and teams worldwide

Abundant sports marketing sponsorship

such as Real Madrid CF and Chelsea FC, to enhance its brand awareness and influence.



GLOBAL LAYOUT

Linglong collects global extraordinary wisdom to demonstrate intelligent Linglong with technological innovation. The company has established R&D institutions in Germany, America, Beijing, Shanghai, Jinan, Yantai and Zhaoyuan, owning national enterprise design center, national recognized testing laboratory and national industrial design center, to form global integrative R&D pattern.


R&D Center in America


R&D Center in Germany

Serbia


Linglong International Europe d.o.o.Zrenjanin

R&D Center

- R&D Center in Zhaoyuan and Yantai
- R&D Center in Beijing
- R&D Center in Shanghai
- R&D Center in Jinan

Linglong Tyre Co.,Ltd.

- Jilin Linglong Tyre Co.,Ltd.
- Shandong Linglong Tyre Co.,Ltd.
- Dezhou Linglong Tyre Co.,Ltd.
- Shaanxi Linglong Tyre Co., Ltd.
- Hubei Linglong Tyre Co.,Ltd.
- Guangxi Linglong Tyre Co.,Ltd.
- Anhui Linglong Tyre Co.,Ltd.


Linglong International Tyre(Thailand)Co.,Ltd



7+5 STRATEGIC GLOBAL POSITIONING

In June 2021, Linglong plans to change its 6+6 global layout into 7+5 global layout to build seven Chinese manufacturing bases as well as five overseas manufacturing bases. At present, the company has five Chinese manufacturing bases in Zhaoyuan, Dezhou, Liuzhou, Jingmen, Changchun and two overseas manufacturing bases in Thailand and Serbia. Meanwhile, Linglong will carry out active inspection of its new factory's location, aiming at completing the full completion of 7+5 global layout, and fully utilizing global resources and expanding its global tire market.

90° N
On August 7th, 2016, Linglong Tire reaching North Pole

Europe

- Ads on ten clubs of Europe five major league matches
- Global Club of Champions Partner and Official Jersey Sleeve Sponsor of VfL Wolfsburg
- Sponsor of Serbian SuperLiga from 2019 to 2022
- Title sponsor of Linglong Tire Cup Sino-European Chess Elite Tournament

Asia

- Senior sponsor for the China Pavilion at Expo 2020 Dubai UAE
- Set up ATLAS Tire Drift Team for DCGP Set up Linglong Tire Drift Team for D1 GRAND PRIX in Japan
- Sponsor China Truck Racing Championship from 2015 to 2017
- Sponsor the Ratchaburi Mitr Phol FC
- Sponsor Chinese Volleyball League of 2017-2020 season
- Official Partner of Formula Drift Japan

North America

- Official Automotive Tire of the NHL Tampa Bay Lightning
- Official Automotive Tire of USF Athletics
- Official Partner of NBA China Games

Africa

- Sponsor the Uganda National Basketball Team
- Sponsor Zimbabwe Cricket

South America

- Sponsor Brazilian football club to improve its brand awareness in South America

Oceania

- Sponsor Brisbane Roar FC
- Sponsor Australia Queensland Football Team

90° S
On December 3, 2016, Linglong Tire reaching South Pole

PROFESSIONAL AUTHORITATIVE LARGE OUTDOOR COMPREHENSIVE TIRE PROVING GROUND



Professional Authoritative Large Outdoor Comprehensive Tire Proving Ground

The Sino-Asia Tire Proving Ground is invested by Linglong Group, designed and constructed by a top international professional team. The total investment is nearly RMB 1.3 billion yuan. It builds 17 kinds of tire test tracks including wet handling road, wet ring, fatigue endurance road, NVH and comfort road, multi-functional platform and test mountain, off-road road, etc., covering the tire test of passenger vehicle, light trucks, heavy-duty trucks and buses, it can conduct field monitoring and indoor tests on more than 40 performance indicators such as tire handling, economy and comfort.



Automobile Testing Center

The second phase of the automobile testing center project plans to invest 1.314 billion yuan, including indoor laboratories such as the vehicle performance laboratory, parts laboratory, vehicle energy consumption/new energy laboratory, dynamics laboratory, intelligent networking laboratory, NVH laboratory, dynamic imprint laboratory, and intelligent networking testing field.

The project also includes 43 customer workshops of different specifications, 3 warehousing centers, and Huizhi Hotel. After completion, it will become a third-party testing platform for the automotive industry to gather innovation and service innovation.




Virtual simulation technology

In 2021, virtual simulation technology has made another breakthrough, promoting the application of whole vehicle driving simulator technology, virtualizing the whole vehicle and tires, adopting the VI grade DIM250 model, and achieving a 9-degree-of-freedom driving experience.

At that time, this technology will be the first in the industry and currently the largest and most advanced tire simulation technology in China.



T1, the asphalt concrete high-speed runway with the largest inclination in the world

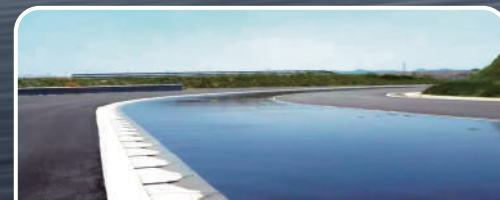

T9, the first wet control road in China



T10, wet circular loop

ALL SEASON / ALL WEATHER



▶ ALL SEASON / ALL WEATHER

FORCE UHP PAGE 17

PARALLER H/T PAGE 27

PRIVA R/T PAGE 35

FORCE HP PAGE 23

PARALLER A/T PAGE 29

PARALLER M/T PAGE 37

PARALLER 4X4 HP PAGE 25

PRIVA X/T PAGE 33

AT R781 PAGE 39

ALL SEASON / ALL WEATHER

2025



The World Rides on ATLAS

FORCE UHP

Ultra High Performance Tire



- ▼ Excellent dry and wet handling performance.
- ▼ Asymmetric tread pattern design for better drainage performance inside and grip performance outside, excellent steering performance.
- ▼ Wide tread surface for superior comfortable ride.



FORCE UHP

 PCR/UHP

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16									
	195/45R16 XL	-	84	V	6 1/2J	500	1102	340	50
	205/50R16	-	87	W	6 1/2J	545	1201	300	44
	205/55R16	-	91	W	6 1/2J	615	1356	300	44
	215/50R16 XL	-	94	W	7J	670	1477	340	50
	215/55R16 XL	-	97	W	7J	730	1609	340	50
	225/50R16	-	92	W	7J	630	1389	300	44
	225/55R16	-	95	W	7J	690	1521	300	44
17									
	195/40R17 XL	-	81	V	7J	462	1019	340	50
	195/45R17 XL	-	85	W	6 1/2J	515	1135	340	50
	205/40R17 XL	-	84	W	7 1/2J	500	1102	340	50
	205/45R17 XL	-	88	W	7J	560	1235	340	50
	205/50R17 XL	-	93	W	6 1/2J	650	1433	340	50
	205/55R17	-	91	V	6 1/2J	615	1356	350	51
	215/45R17 XL	-	91	W	7J	615	1356	340	50
	215/50R17 XL	-	95	W	7J	690	1521	340	50
	215/55R17	-	94	W	7J	670	1477	300	44
	225/45R17 XL	-	94	W	7 1/2J	670	1477	340	50
	225/50R17 XL	-	98	W	7J	750	1653	340	50
	225/55R17	-	97	W	7J	730	1609	300	44
	235/45R17 XL	-	97	W	8J	730	1609	340	50
	235/50R17	-	96	W	7 1/2J	710	1565	300	44
	235/55R17	-	99	W	7 1/2J	775	1709	300	44
	245/40R17	-	91	W	8 1/2J	615	1356	300	44
	245/45R17 XL	-	99	W	8J	775	1709	340	50
	245/65R17 XL	-	111	H	7J	1090	2403	340	50
	255/40R17 XL	-	98	W	9J	750	1653	340	50
	275/40R17	-	98	W	9 1/2J	750	1653	300	44

FORCE UHP

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
18									
	195/35R18 XL	-	79	W	7J	437	963	340	50
	205/35R18 XL	-	81	W	7 1/2J	462	1019	340	50
	205/40R18 XL	-	86	W	7 1/2J	530	1168	340	50
	215/35R18 XL	-	84	W	7 1/2J	500	1102	340	50
	215/40R18 XL	-	89	Y	7 1/2J	580	1279	340	50
	215/45R18 XL	-	93	Y	7J	650	1433	340	50
	225/35R18 XL	-	87	W	8J	545	1201	340	50
	225/40R18 XL	-	92	Y	8J	630	1389	340	50
	225/45R18 XL	-	95	Y	7 1/2J	690	1521	340	50
	225/50R18	-	95	W	7J	690	1521	300	44
	235/40R18 XL	-	95	Y	8 1/2J	690	1521	340	50
	235/45R18 XL	-	98	Y	8J	750	1653	340	50
	235/50R18	-	97	Y	7 1/2J	730	1609	300	44
	245/40R18 XL	-	97	Y	8 1/2J	730	1609	340	50
	245/45R18 XL	-	100	Y	8J	800	1764	340	50
	245/50R18	-	100	Y	7 1/2J	800	1764	300	44
	255/35R18 XL	-	94	Y	9J	670	1477	340	50
	255/40R18 XL	-	99	Y	9J	775	1709	340	50
	255/45R18 XL	-	103	W	8 1/2J	875	1929	340	50
	255/55R18 XL	-	109	W	8J	1030	2271	340	50
	265/35R18 XL	-	97	W	9 1/2J	730	1609	340	50
	265/40R18 XL	-	101	Y	9 1/2J	825	1819	340	50
	275/35R18	-	95	Y	9 1/2J	690	1521	300	44
	275/40R18 XL	-	103	Y	9 1/2J	875	1929	340	50
	305/30R18	-	97	W	11J	730	1609	300	44

FORCE UHP

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
19									
	215/35R19 XL	-	85	V	7 1/2J	515	1135	340	50
	225/35R19 XL	-	88	W	8J	560	1235	340	50
	225/40R19 XL	-	93	Y	8J	650	1433	340	50
	225/45R19 XL	-	96	Y	7 1/2J	710	1565	340	50
	235/35R19 XL	-	91	Y	8 1/2J	615	1356	340	50
	235/40R19 XL	-	96	Y	8 1/2J	710	1565	340	50
	235/50R19	-	99	V	7 1/2J	775	1709	350	51
	235/55R19 XL	-	105	Y	7 1/2J	925	2039	340	50
	245/35R19 XL	-	93	W	8 1/2J	650	1433	340	50
	245/40R19 XL	-	98	Y	8 1/2J	750	1653	340	50
	245/45R19 XL	-	102	W	8J	850	1874	340	50
	245/50R19 XL	-	105	W	7 1/2J	925	2039	340	50
	245/55R19	-	103	V	7 1/2J	875	1929	300	44
	255/35R19 XL	-	96	Y	9J	710	1565	340	50
	255/40R19 XL	-	100	Y	9J	800	1764	340	50
	255/45R19 XL	-	104	Y	8 1/2J	900	1984	340	50
	255/50R19 XL	-	107	Y	8J	975	2149	340	50
	255/60R19	-	109	H	7 1/2J	1030	2271	300	44
	265/30R19 XL	-	93	W	9 1/2J	650	1433	340	50
	265/35R19 XL	-	98	Y	9 1/2J	750	1653	340	50
	265/40R19 XL	-	102	Y	9 1/2J	850	1874	340	50
	265/50R19 XL	-	110	W	8 1/2J	1060	2337	340	50
	275/30R19 XL	-	96	W	9 1/2J	710	1565	340	50
	275/35R19 XL	-	100	Y	9 1/2J	800	1764	340	50
	275/40R19 XL	-	105	Y	9 1/2J	925	2039	340	50
	275/45R19 XL	-	108	W	9J	1000	2205	340	50
	275/55R19	-	111	W	8 1/2J	1090	2403	300	44
	285/35R19 XL	-	103	Y	10J	875	1929	340	50
	285/45R19 XL	-	111	W	9 1/2J	1090	2403	340	50
	295/30R19 XL	-	100	W	10 1/2J	800	1764	340	50

FORCE UHP

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
20									
	295/40R20 XL	-	110	W	10 1/2J	1060	2337	340	50
	305/40R20 XL	-	112	Y	11J	1120	2469	340	50
	215/30R20 XL	-	82	W	7 1/2J	475	1047	340	50
	225/30R20 XL	-	85	W	8J	515	1135	340	50
	225/35R20 XL	-	90	W	8J	600	1323	340	50
	235/30R20 XL	-	88	W	8 1/2J	560	1235	340	50
	235/35R20 XL	-	92	W	8 1/2J	630	1389	340	50
	235/55R20	-	102	V	7 1/2J	850	1874	350	51
	245/30R20 XL	-	90	W	8 1/2J	600	1323	340	50
	245/35R20 XL	-	95	W	8 1/2J	690	1521	340	50
	245/40R20 XL	-	99	Y	8 1/2J	775	1709	340	50
	245/45R20 XL	-	103	Y	8J	875	1929	340	50
	245/50R20	-	102	V	7 1/2J	850	1874	300	44
	255/30R20 XL	-	92	W	9J	630	1389	340	50
	255/35R20 XL	-	97	Y	9J	730	1609	340	50
	255/40R20 XL	-	101	W	9J	825	1819	340	50
	255/45R20 XL	-	105	Y	8 1/2J	925	2039	340	50
	255/50R20 XL	-	109	Y	8J	1030	2271	340	50
	265/35R20 XL	-	99	Y	9 1/2J	775	1709	340	50
	265/45R20 XL	-	108	Y	9J	1000	2205	340	50
	265/50R20 XL	-	111	V	8 1/2J	1090	2403	340	50
	275/30R20 XL	-	97	Y	9 1/2J	730	1609	340	50
	275/35R20 XL	-	102	Y	9 1/2J	850	1874	340	50
	275/40R20 XL	-	106	Y	9 1/2J	950	2094	340	50
	275/45R20 XL	-	110	W	9J	1060	2337	340	50
	285/25R20 XL	-	93	W	10 1/2J	650	1433	340	50
	285/50R20	-	112	V	9J	1120	2469	300	44
	295/25R20 XL	-	95	Y	10 1/2J	690	1521	340	50
	305/25R20 XL	-	97	Y	11J	730	1609	340	50
	315/35R20 XL	-	110	W	11J	1060	2337	340	50
21									
	235/35R21	-	89	W	8 1/2J	580	1279	300	44
	245/30R21 XL	-	91	W	8 1/2J	615	1356	340	50
	245/35R21 XL	-	96	W	8 1/2J	710	1565	340	50
	255/30R21 XL	-	93	W	9J	650	1433	340	50
	HL255/35R21	-	101	Y	9J	825	1819	340	50
	265/40R21 XL	-	105	V	9 1/2J	925	2039	340	50
	275/35R21	-	99	W	9 1/2J	775	1709	300	44
	285/30R21 XL	-	100	Y	10J	800	1764	340	50
	295/35R21 XL	-	107	Y	10 1/2J	975	2149	340	50
	275/45R21 XL	-	110	W	9J	1060	2337	340	50
	285/40R21 XL	-	109	W	10J	1030	2271	340	50
	315/35R21 XL	-	111	W	11J	1090	2403	340	50
	315/40R21 XL	-	115	Y	11J	1215	2679	340	50

FORCE UHP

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
22									
	315/30R22 XL	-	107	Y	11J	975	2149	340	50
	235/30R22 XL	-	90	W	8 1/2J	600	1323	340	50
	245/30R22 XL	-	92	W	8 1/2J	630	1389	340	50
	255/30R22 XL	-	95	W	9J	690	1521	340	50
	265/30R22 XL	-	97	W	9 1/2J	730	1609	340	50
	265/35R22 XL	-	102	V	9 1/2J	850	1874	340	50
	265/40R22 XL	-	106	V	9 1/2J	950	2094	340	50
	285/25R22 XL	-	95	Y	10 1/2J	690	1521	340	50
	285/35R22 XL	-	106	W	10J	950	2094	340	50
	285/40R22 XL	-	110	V	10J	1060	2337	340	50
	285/45R22 XL	-	114	V	9 1/2J	1180	2601	340	50
	295/25R22 XL	-	97	W	10 1/2J	730	1609	340	50
	295/30R22 XL	-	103	V	10 1/2J	875	1929	340	50
	305/25R22 XL	-	99	Y	11J	775	1709	340	50
	305/40R22 XL	-	114	V	11J	1180	2601	340	50
	305/45R22 XL	-	118	V	10J	1320	2910	340	50
24									
	245/30R24 XL	-	94	W	8 1/2J	670	1477	340	50
	255/30R24 XL	-	97	W	9J	730	1609	340	50
	275/25R24 XL	-	96	W	10J	710	1565	340	50
	275/30R24 XL	-	101	W	9 1/2J	825	1819	340	50
	295/30R24 XL	-	104	V	10 1/2J	900	1984	340	50
	295/35R24 XL	-	110	V	10 1/2J	1060	2337	340	50
	305/35R24 XL	-	112	V	11J	1120	2469	340	50
26									
	255/30R26 XL	-	99	W	9J	775	1709	340	50
	275/25R26 XL	-	98	W	10J	750	1653	340	50
	295/30R26 XL	-	107	W	10 1/2J	975	2149	340	50
	305/30R26 XL	-	109	W	11J	1030	2271	340	50
28									
	275/25R28 XL	-	99	W	10J	775	1709	340	50
	295/25R28 XL	-	103	V	10 1/2J	875	1929	340	50
30									
	275/25R30 XL	-	101	W	10J	825	1819	340	50

FORCE HP

High Performance Tire

- ▼ Open shoulder groove design for superior safety and quiet ride.
- ▼ Straight center pattern blocks for more comfortable ride.



RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
13									
	175/70R13 WR	-	82	H	5.00B	475	1047	300	44
	185/60R13 WR	-	80	H	5 1/2J	450	992	300	44
14									
	175/65R14	-	82	H	5J	475	1047	300	44
	185/60R14	-	82	H	5 1/2J	475	1047	300	44
	185/65R14	-	86	H	5 1/2J	530	1168	300	44
15									
	175/65R15	-	84	H	5J	500	1102	300	44
	185/55R15	-	82	V	6J	475	1047	300	44
	185/60R15	-	84	H	5 1/2J	500	1102	300	44
	185/65R15	-	88	H	5 1/2J	560	1235	300	44
	195/50R15	-	82	H	6J	475	1047	300	44
	195/55R15	-	85	V	6J	515	1135	300	44
	195/60R15	-	88	H	6J	560	1235	300	44
	195/65R15	-	91	H	6J	615	1356	300	44
16									
	185/60R16	-	86	H	5 1/2J	530	1168	350	51
	195/50R16	-	84	V	6J	500	1102	300	44
	195/55R16	-	87	V	6J	545	1201	300	44
	195/60R16	-	89	H	6J	580	1279	350	51

Three Grooves

FORCE HP

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15									
	205/60R15	-	91	H	6J	615	1356	300	44
	205/65R15	-	94	H	6J	670	1477	300	44
	215/60R15	-	94	H	6 1/2J	670	1477	300	44
	215/75R15	-	100	S	6J	800	1764	300	44
	235/75R15	-	105	S	6 1/2J	925	2039	300	44
16									
	205/50R16	-	87	V	6 1/2J	545	1201	300	44
	205/55R16	-	91	V	6 1/2J	615	1356	300	44
	205/60R16	-	92	V	6J	630	1389	300	44
	205/65R16	-	95	H	6J	690	1521	300	44
	215/55R16 XL	-	97	H	7J	730	1609	340	50
	215/60R16	-	95	V	6 1/2J	690	1521	300	44
	215/65R16	-	98	H	6 1/2J	750	1653	300	44
	225/55R16	-	95	V	7J	690	1521	300	44
	225/60R16	-	98	H	6 1/2J	750	1653	300	44
	225/65R16	-	100	H	6 1/2J	800	1764	300	44
	225/70R16 XL	-	107	H	6 1/2J	975	2149	340	50
	235/60R16	-	100	H	7J	800	1764	300	44
	235/65R16	-	103	H	7J	875	1929	300	44
17									
	205/50R17 XL	-	93	V	6 1/2J	650	1433	340	50
	215/45R17 XL	-	91	V	7J	615	1356	340	50
	215/50R17 XL	-	95	V	7J	690	1521	340	50
	215/55R17	-	94	V	7J	670	1477	300	44
	215/60R17	-	96	H	6 1/2J	710	1565	300	44
	215/65R17	-	99	H	6 1/2J	775	1709	300	44
	225/45R17 XL	-	94	V	7 1/2J	670	1477	340	50
	225/50R17 XL	-	98	V	7J	750	1653	340	50
	225/55R17	-	97	V	7J	730	1609	300	44
	225/60R17	-	99	H	6 1/2J	775	1709	300	44
	225/65R17	-	102	H	6 1/2J	850	1874	300	44
	235/45R17 XL	-	97	V	8J	730	1609	340	50
	235/55R17	-	99	V	7 1/2J	775	1709	300	44
	235/60R17	-	102	H	7J	850	1874	300	44
	235/65R17	-	104	H	7J	900	1984	300	44
	245/45R17 XL	-	99	V	8J	775	1709	340	50
	245/50R17	-	99	V	7 1/2J	775	1709	300	44
18									
	225/40R18 XL	-	92	V	8J	630	1389	340	50
	225/45R18 XL	-	95	V	7 1/2J	690	1521	340	50
	225/50R18 XL	-	99	V	7J	775	1709	340	50
	225/55R18	-	98	V	7J	750	1653	300	44
	225/60R18	-	100	H	6 1/2J	800	1764	300	44
	235/40R18 XL	-	95	V	8 1/2J	690	1521	340	50
	235/45R18	-	94	V	8J	670	1477	300	44
	235/50R18	-	97	V	7 1/2J	730	1609	300	44
	235/55R18	-	100	V	7 1/2J	800	1764	300	44
	235/60R18	-	103	V	7J	875	1929	300	44
	245/40R18 XL	-	97	V	8 1/2J	730	1609	340	50
	245/45R18 XL	-	100	V	8J	800	1764	340	50
19									
	235/55R19	-	101	V	7 1/2J	825	1819	300	44
	245/40R19 XL	-	98	V	8 1/2J	750	1653	340	50
	255/50R19 XL	-	107	V	8J	975	2149	340	50
20									
	245/45R20	-	99	V	8J	775	1709	300	44
	245/50R20	-	102	V	7 1/2J	850	1874	300	44

Four Grooves

PARALLER 4X4 HP

Balanced Performance SUV Tire

- ▼ Four circumferential grooves help channel water to resist hydroplaning and help maintain wet traction.
- ▼ Solid center-rib tread design provides continuous tread contact with the road to enhance steering response and handling.



RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15									
	215/75R15	-	100	S	6J	800	1764	300	44
	235/70R15 XL	-	106	H	7J	950	2094	340	50
16									
	205/70R16	-	97	V	6J	730	1609	300	44
	215/65R16 XL	-	102	H	6 1/2J	850	1874	340	50
	215/70R16	-	100	H	6 1/2J	800	1764	300	44
	225/75R16	-	104	H	6J	900	1984	300	44
	235/70R16	-	106	H	7J	950	2094	300	44
	245/70R16 XL	-	111	H	7J	1090	2403	340	50
	265/70R16	-	112	H	8J	1120	2469	300	44
	275/70R16	-	114	H	8J	1180	2601	300	44

PARALLER 4X4 HP

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
17									
	215/60R17	-	96	H	6 1/2J	710	1565	300	44
	225/55R17 XL	-	101	V	7J	825	1819	340	50
	225/60R17	-	99	H	6 1/2J	775	1709	300	44
	225/65R17	-	102	H	6 1/2J	850	1874	300	44
	235/55R17 XL	-	103	W	7 1/2J	875	1929	340	50
	235/60R17 XL	-	106	V	7J	950	2094	340	50
	235/65R17 XL	-	108	V	7J	1000	2205	340	50
	235/70R17 XL	-	109	T	7J	1030	2271	340	50
	245/65R17 XL	-	111	H	7J	1090	2403	340	50
	255/60R17	-	106	H	7 1/2J	950	2094	300	44
	255/65R17	-	110	H	7 1/2J	1060	2337	300	44
	255/70R17	-	112	T	7 1/2J	1120	2469	300	44
	265/65R17	-	112	H	8J	1120	2469	300	44
18									
	225/60R18	-	100	H	6 1/2J	800	1764	300	44
	235/55R18 XL	-	104	V	7 1/2J	900	1984	340	50
	235/60R18 XL	-	107	V	7J	975	2149	340	50
	235/65R18	-	106	H	7J	950	2094	300	44
	245/60R18	-	105	V	7J	925	2039	300	44
	255/55R18 XL	-	109	V	8J	1030	2271	340	50
	255/65R18	-	111	H	7 1/2J	1090	2403	300	44
	255/70R18	-	113	T	7 1/2J	1150	2535	300	44
	265/60R18	-	110	H	8J	1060	2337	300	44
	265/65R18	-	114	H	8J	1180	2601	300	44
	265/70R18	-	116	T	8J	1250	2756	300	44
	275/65R18	-	116	H	8J	1250	2756	300	44
19									
	225/55R19	-	99	V	7J	775	1709	300	44
	255/55R19 XL	-	111	V	8J	1090	2403	340	50

PARALLER H/T

High-way Terrain Tire



- ▼ Noise reduction, handling performance.
- ▼ Braking & Traction Performance:
Long interlocking center rib and wide shoulder blocks maximize the traction and provide short braking distances.



HT

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15									
	235/75R15 XL	-	109	T	6 1/2J	1030	2271	340	50
16									
	215/70R16	-	100	T	6 1/2J	800	1764	300	44
	225/70R16	-	103	T	6 1/2J	875	1929	300	44
	235/70R16	-	106	T	7J	950	2094	300	44
	235/80R16	-	109	T	6 1/2J	1030	2271	300	44
	245/70R16	-	107	T	7J	975	2149	300	44
	245/75R16	-	111	T	7J	1090	2403	300	44
	255/70R16	-	111	T	7 1/2J	1090	2403	300	44
	265/70R16	-	112	T	8J	1120	2469	300	44
	265/75R16	-	116	T	7 1/2J	1250	2756	300	44
	LT215/85R16	10PR	115/112 S		6J	D 1120 S 1215 D 2470 S 2680		550	80
	LT225/75R16	10PR	115/112 S		6J	D 1120 S 1215 D 2470 S 2680		550	80
	LT235/65R16	10PR	121/119 R		7J	D 1360 S 1450 D 3000 S 3195		550	80
	LT235/85R16	10PR	120/116 R		6 1/2J	D 1285 S 1400 D 2835 S 3085		550	80
	LT245/75R16	10PR	120/116 R		7J	D 1260 S 1380 D 2778 S 3042		550	80
	LT265/75R16	10PR	123/120 R		7 1/2J	D 1400 S 1550 D 3085 S 3415		550	80

PARALLER H/T

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
17									
	235/65R17	-	104	T	7J	900	1984	300	44
	245/65R17	-	107	T	7J	975	2149	300	44
	245/70R17	-	110	T	7J	1060	2337	300	44
	265/65R17	-	112	T	8J	1120	2469	300	44
	265/70R17	-	115	T	8J	1215	2679	300	44
	LT265/70R17	10PR	121/118 R		8J	D 1320 S 1450 D 2910 S 3195		550	80
19									
	275/50R19 XL	-	112	V	8 1/2J	1120	2469	340	50
20									
	265/50R20 XL	-	111	V	8 1/2J	1090	2403	340	50
	275/55R20 XL	-	117	T	8 1/2J	1285	2833	340	50
	275/60R20	-	115	T	8J	1215	2679	300	44

PARALLER A/T

On & Off Road
All-Terrain Tire

- ▼ Excellent traction off-road and wet performance.
- ▼ Closed shoulder design ensures long tread life and resists uneven wear.
- ▼ Designed to combine a quiet highway ride and long tread life with all-terrain performance.



AT

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
14									
	175/80R14	-	88	T	5J	560	1235	300	44
15									
	205/60R15	-	91	H	6J	615	1356	300	44
	205/65R15	-	94	H	6J	670	1477	300	44
	205/70R15	-	96	T	6J	710	1565	300	44
	235/75R15XL OWL	-	109	T	6 1/2J	1030	2271	340	50
	265/70R15 OWL	-	112	T	8J	1120	2469	300	44
	31X10.50R15LT OWL 6PR		109	R	8 1/2J	1030	2270	350	51
	31X10.50R15LT OWL 6PR		109	Q	8 1/2J	1030	2270	350	51
	LT235/75R15 OWL 6PR		104/101	R	6 1/2J	D 825 S 900	D 1820 S 1985	350	50
	LT235/75R15 OWL 6PR		104/101	Q	6 1/2J	D 825 S 900	D 1820 S 1985	350	50

PARALLER A/T

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16									
	205/60R16	-	92	H	6J	630	1389	300	44
	215/65R16	-	98	T	6 1/2J	750	1653	300	44
	235/70R16 OWL	-	106	T	7J	950	2094	300	44
	245/70R16XL OWL	-	111	T	7J	1090	2403	340	50
	245/75R16 OWL	-	111	T	7J	1090	2403	300	44
	255/70R16 OWL	-	111	S	7 1/2J	1090	2403	300	44
	265/70R16 OWL	-	112	T	8J	1120	2469	300	44
	265/75R16 OWL	-	116	T	7 1/2J	1250	2756	300	44
	LT215/85R16 OWL 10PR		115/112	Q	6J	D 1120 S 1215	D 2470 S 2680	550	80
	LT225/75R16 OWL 10PR		115/112	Q	6J	D 1120 S 1215	D 2470 S 2680	550	80
	LT235/85R16 OWL 10PR		120/116	S	6 1/2J	D 1260 S 1380	D 2778 S 3042	550	80
	LT235/85R16 OWL 10PR		120/116	Q	6 1/2J	D 1260 S 1380	D 2778 S 3042	550	80
	LT245/75R16 OWL 10PR		120/116	Q	7J	D 1260 S 1380	D 2778 S 3042	550	80
	LT265/75R16 OWL 10PR		123/120	R	7 1/2J	D 1400 S 1550	D 3086 S 3417	550	80
	LT285/75R16 OWL 10PR		126/123	R	8J	D 1550 S 1700	D 3415 S 3750	550	80
	LT305/70R16 OWL 10PR		124/121	R	9J	D 1450 S 1600	D 3195 S 3525	450	65
17									
	245/65R17 OWL XL	-	111	T	7J	1090	2403	340	50
	245/70R17 OWL	-	110	S	7J	1060	2337	300	44
	265/65R17 OWL	-	112	T	8J	1120	2469	300	44
	265/70R17 OWL	-	115	T	8J	1215	2679	300	44
	285/70R17 OWL	-	116	T	8 1/2J	1250	2756	300	44
	LT235/80R17 OWL 10PR		120/117	R	6 1/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT235/80R17 OWL 10PR		120/117	Q	6 1/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT245/70R17 OWL 10PR		119/116	Q	7J	D 1250 S 1360	D 2755 S 3000	550	80
	LT245/75R17 OWL 10PR		121/118	R	7J	D 1320 S 1450	D 2910 S 3195	550	80
	LT265/70R17 OWL 10PR		121/118	R	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT265/70R17 OWL 10PR		121/118	Q	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT285/70R17 OWL 8PR		121/118	S	8 1/2J	D 1320 S 1450	D 2910 S 3195	450	65
	LT285/70R17 OWL 10PR		121/118	S	8 1/2J	D 1320 S 1450	D 2910 S 3195	450	65
	LT305/70R17 OWL 8PR		119/116	R	9J	D 1250 S 1360	D 2755 S 3000	350	50

PARALLER A/T

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
18									
	225/60R18	-	104	H	6 1/2J	900	1984	300	44
	255/70R18 OWL	-	113	S	7 1/2J	1150	2535	300	44
	265/70R18 OWL	-	116	T	8J	1250	2756	300	44
	275/65R18 OWL	-	116	T	8J	1250	2756	300	44
	LT265/65R18 OWL 10PR		122/119	Q	8J	D 1360 S 1500	D 3000 S 3305	550	80
	LT265/70R18 OWL 10PR		124/121	S	8J	D 1450 S 1600	D 3195 S 3525	550	80
	LT275/65R18 OWL 10PR		123/120	S	8J	D 1400 S 1550	D 3085 S 3415	550	80
	LT275/70R18 OWL 10PR		125/122	S	8J	D 1500 S 1650	D 3305 S 3640	550	80
	LT305/60R18 OWL 10PR		121/118	R	9J	D 1320 S 1450	D 2910 S 3195	450	65
19									
	255/55R19	-	107	H	8J	975	2149	300	44
20									
	275/55R20 OWL	-	113	S	8 1/2J	1150	2535	300	44
	275/60R20 OWL	-	115	T	8J	1215	2679	300	44
	LT275/55R20 OWL 10PR		120/117	Q	8 1/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT275/60R20 OWL 10PR		123/120	Q	8J	D 1400 S 1550	D 3085 S 3415	550	80
	LT275/65R20 OWL 10PR		126/123	R	8J	D 1550 S 1700	D 3415 S 3750	550	80
	LT285/55R20 OWL 10PR		122/119	S	9J	D 1360 S 1500	D 3000 S 3305	550	80
	LT305/55R20 OWL 10PR		121/118	R	9 1/2J	D 1320 S 1450	D 2910 S 3195	450	65



PRIVA X/T

All Weather
Extreme All-Terrain Tire

- ▼ Three-ply sidewall enhances cut and chip resistance.
- ▼ Variable pitch sequencing design reduces road noise.
- ▼ High angled grooves are engineered for efficient water evacuation.
- ▼ The Three-Peak Mountain Snowflake designation for use in severe winter conditions.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
					kg	lbs	kPa	psi
265/75R16	-	116	T	7 1/2J	1250	2756	300	44
LT245/75R16	10PR	120/116	Q	7J	S 1380 D 1260 S 3042 D 2778		550	80
LT265/75R16	10PR	123/120	Q	7 1/2J	S 1550 D 1400 S 3415 D 3085		550	80
LT285/75R16	10PR	126/123	Q	8J	S 1700 D 1550 S 3750 D 3415		550	80
265/70R17	-	115	T	8J	1215	2679	300	44
LT235/80R17	10PR	120/117	Q	6 1/2J	S 1400 D 1285 S 3085 D 2385		550	80
LT245/70R17	10PR	119/116	S	7J	S 1360 D 1250 S 3000 D 2755		550	80
LT245/75R17	10PR	121/118	Q	7J	S 1450 D 1320 S 3195 D 2910		550	80
LT265/70R17	10PR	123/120	Q	8J	S 1550 D 1400 S 3415 D 3085		550	80
LT285/70R17	8PR	122/119	Q	8 1/2J	S 1500 D 1360 S 3305 D 3000		450	65
35X12.50R17LT	10PR	125	R	10J	1650	3640	450	65

PRIVA X/T

RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
18									
	275/65R18	XL	116	T	8J	1250	2756	340	50
	LT265/70R18	10PR	124/121	Q	8J	S 1600 D 1450 S 3525 D 3195		550	80
	LT275/65R18	10PR	123/120	Q	8J	S 1550 D 1400 S 3415 D 3085		550	80
	LT275/70R18	10PR	125/122	Q	8J	S 1650 D 1500 S 3640 D 3305		550	80
	LT285/65R18	10PR	125/122	Q	8 1/2J	S 1650 D 1500 S 3640 D 3305		550	80
	33X12.50R18LT	12PR	122	R	10J	1500	3305	550	80
	35X12.50R18LT	10PR	123	R	10J	1550	3415	450	65
20									
	275/55R20	XL	117	T	8 1/2J	1285	2833	340	50
	275/60R20	-	115	R	8J	1215	2679	300	44
	LT265/60R20	10PR	121/118	Q	8J	S 1450 D 1320 S 3195 D 2910		550	80
	LT275/55R20	10PR	120/117	S	8 1/2J	S 1400 D 1285 S 3085 D 2385		550	80
	LT275/60R20	10PR	123/120	Q	8J	S 1550 D 1400 S 3415 D 3085		550	80
	LT275/65R20	10PR	126/123	Q	8J	S 1700 D 1550 S 3750 D 3415		550	80
	LT285/55R20	10PR	122/119	S	9J	S 1500 D 1360 S 3305 D 3000		550	80
	33X12.50R20LT	12PR	119	R	10J	1360	3000	550	80
	35X12.50R20LT	12PR	125	Q	10J	1650	3640	550	80
22									
	33X12.50R22LT	12PR	114	R	10 1/2J	1180	2600	550	80
	35X12.50R22LT	12PR	121	R	10J	1450	3195	550	80

PRIVA R/T

Rugged Terrain Tire

- ▼ Interlocked tread blocks bring excellent grip in wet and snowy conditions.
- ▼ High strength carcass provides protection from impacts and delivers high mileage.
- ▼ Open shoulder grooves discharge mud and snow efficiently for enhanced traction.



RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16									
	LT265/75R16	10PR	123/120	Q	7.5J	S1550 D1400	S3415 D3085	550	80
	LT285/75R16	10PR	126/123	Q	8J	S1700 D1550	S3750 D3415	550	80
17									
	265/70R17	-	115	T	8J	1215	2679	300	44
	33X12.50R17LT	10PR	120	Q	10J	1400	3085	450	65
	35X12.50R17LT	12PR	128	Q	10J	1800	3970	550	80
	37X12.50R17LT	12PR	128	Q	10J	1800	3970	550	80
	LT265/70R17	10PR	123/120	Q	8J	S1550 D1400	S3415 D3085	550	80
	LT285/70R17	10PR	126/123	Q	8.5J	S1700 D1550	S3750 D3415	550	80

PRIVA R/T

RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
18									
	275/65R18	-	116	T	8J	1250	2756	300	44
	33X12.50R18LT	12PR	122	Q	10J	1500	3305	550	80
	35X12.50R18LT	12PR	128	Q	10J	1800	3970	550	80
	37X12.50R18LT	12PR	128	Q	10J	1800	3970	550	80
	LT275/65R18	10PR	123/120	Q	8J	S1550 D1400	S3415 D3085	550	80
	LT275/70R18	10PR	125/122	Q	8J	S1650 D1500	S3640 D3305	550	80
20									
	275/55R20	XL	117	T	8.5J	1285	2833	340	50
	275/60R20	XL	116	T	8J	1250	2756	340	50
	33X12.50R20LT	12PR	119	Q	10J	1360	3000	550	80
	35X12.50R20LT	12PR	125	Q	10J	1650	3640	550	80
	35X13.50R20LT	12PR	126	Q	11J	1700	3750	550	80
	37X12.50R20LT	12PR	128	Q	10J	1800	3970	550	80
	LT275/55R20	10PR	120/117	Q	8.5J	S1400 D1285	S3085 D2835	550	80
	LT275/65R20	10PR	126/123	Q	8J	S1700 D1550	S3750 D3415	550	80
	LT285/55R20	10PR	122/119	S	9J	S1500 D1360	S3305 D3000	550	80
	LT285/60R20	10PR	125/122	Q	8.5J	S1650 D1500	S3640 D3305	550	80
	LT305/55R20	12PR	125/122	Q	9.5J	S1650 D1500	S3640 D3305	550	80
22									
	33X12.50R22LT	12PR	114	Q	10.5J	1180	2600	550	80
	35X12.50R22LT	12PR	121	Q	10J	1450	3195	550	80
	37X12.50R22LT	12PR	127	Q	10J	1750	3860	550	80
	37X13.50R22LT	12PR	128	Q	11J	1800	3970	550	80

PARALLER M/T

Mud Terrain Tire



- ▼ Advanced tread compound as well as muddy ruts for additional off-road traction.
- ▼ Large & Strong block and deep tread enhance grip in tough terrains.

PARALLER M/T



RIM	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15									
	265/70R15	-	112	Q	8J	1120	2469	300	44
	265/75R15	-	112	Q	7 1/2J	1120	2469	300	44
	LT215/75R15	6PR	100/97	Q	6J	D 730 S 800	D 1610 S 1765	350	50
	LT235/75R15	6PR	104/101	Q	6 1/2J	D 825 S 900	D 1820 S 1985	350	50
	30X9.50R15LT	6PR	104	Q	7 1/2J	900	1985	350	50
	31X10.50R15LT	6PR	109	Q	8 1/2J	1030	2270	350	51
	33X12.50R15LT	6PR	108	Q	10J	1000	2205	300	44
	35X12.50R15LT	6PR	113	Q	10J	1150	2535	300	35
16									
	205R16LT	8PR	110/108	Q	6J	D 1000 S 1060	D 2205 S 2335	450	65
	LT225/75R16	8PR	110/107	Q	6J	D 975 S 1060	D 2150 S 2335	450	65
	LT235/85R16 OWL	10PR	120/116	S	6 1/2J	D 1260 S 1380	D 2778 S 3042	550	80
	LT245/75R16	10PR	120/116Q	Q	7J	D 1260 S 1380	D 2778 S 3042	550	80
	LT255/70R16	8PR	115/112	Q	7 1/2J	D 1120 S 1215	D 2470 S 2680	450	65
	LT265/70R16	6PR	110/107	Q	8J	D 975 S 1060	D 2150 S 2335	350	50
	LT265/75R16	10PR	123/120	Q	7 1/2J	D 1400 S 1550	D 3085 S 3415	550	80
	LT285/75R16	10PR	126/123	Q	8J	D 1550 S 1700	D 3415 S 3750	550	80
	LT305/70R16	10PR	124/121	Q	9J	D 1450 S 1600	D 3195 S 3525	450	65
	LT315/75R16	10PR	127/124	Q	8 1/2J	D 1600 S 1750	D 3525 S 3860	450	65
	LT375/65R16	8PR	126/123	Q	11J	D 1550 S 1700	D 3415 S 3750	350	50
17									
	LT235/80R17	10PR	120/117	Q	6 1/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT265/65R17	10PR	120/117	Q	8J	D 1285 S 1400	D 2835 S 3085	550	80
	LT265/70R17	10PR	121/118	Q	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT285/70R17	10PR	121/118	Q	8 1/2J	D 1320 S 1450	D 2910 S 3195	550	80
	LT295/70R17	10PR	121/118	Q	8 1/2J	D 1320 S 1450	D 2910 S 3195	550	80
	LT305/65R17	10PR	121/118	Q	9J	D 1320 S 1450	D 2910 S 3195	450	65
	LT305/70R17	8PR	119/116	Q	9J	D 1250 S 1360	D 2755 S 3000	350	50
	LT315/70R17	10PR	121/118	Q	9 1/2J	D 1320 S 1450	D 2910 S 3195	450	65
	33X12.50R17LT	10PR	120	Q	10J	1400	3085	450	65
	35X12.50R17LT	10PR	121	Q	10J	1450	3195	450	65
	37X12.50R17LT	8PR	124	Q	10J	1600	3525	350	50
	37X13.50R17LT	10PR	121	Q	11J	1450	3195	450	65
	37X13.50R17LT	14PR	137	M	11J	2300	5070	650	95
	40X13.50R17LT	8PR	121	Q	11J	1450	3195	350	50

AT R781

Trailer Tire

- ▼ Low fuel consumption.
- ▼ Specially designed for trailer.



RIM	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
13									
	ST175/80R13	6PR	91/87	M	5J	D 545 S 615	D 1200 S 1360	350	50
14									
	ST205/75R14	6PR	100/96	M	5 1/2J	D 710 S 800	D 1570 S 1760	350	50
	ST205/75R14	8PR	105/101	M	5 1/2J	D 825 S 925	D 1820 S 2040	450	65
	ST215/75R14	6PR	102/98	M	6J	D 750 S 850	D 1650 S 1870	350	50
15									
	ST205/75R15	8PR	107/102	M	5 1/2J	D 850 S 975	D 1870 S 2150	450	65
	ST205/75R15	6PR	101/97	M	5 1/2J	D 730 S 825	D 1610 S 1820	350	50
	ST225/75R15	8PR	113/108	M	6J	D 1000 S 1150	D 2200 S 2540	450	65
	ST225/75R15	10PR	117/112	M	6J	D 1120 S 1285	D 2470 S 2830	550	80
16									
	ST235/80R16	10PR	123/119	M	6 1/2J	D 1360 S 1550	D 3000 S 3420	550	80
	ST235/80R16	12PR	126/122	M	6 1/2J	D 1500 S 1700	D 3305 S 3750	650	95
	ST235/85R16	10PR	125/121	M	6 1/2J	D 1450 S 1650	D 3200 S 3640	550	80

REPLACEMENT MARKET TIRES WARRANTY

Warranty Eligibility

This limited warranty applies to all the qualified replacement market Passenger and Light Truck Tires produced by Shandong Linglong Tyre Co., Ltd. and all its subsidiaries. This Limited Warranty only applies to the original purchaser, and the tire has a complete brand identification, DOT or barcode, and it is valid if all of the following apply:

- The tires are manufactured after January 1, 2025, and are shipped to North America for sale and use.
- The tire fails due to the workmanship or materials.
- The tire shall not exceed the warranty period, and the remaining pattern shall not be less than TWI.

What is warranted and for how long

If the tire covered by this limited warranty become unusable due to a workmanship or material related condition during its usable tread depth is more than TWI, LingLong will provide compensation on the following conditions:

- The warranty period is 6 years from the date of purchase, or 7 years from the date of production, whichever comes first, and the remaining pattern depth is not less than TWI.
- If the tire fails due to manufacturing reasons and meets the warranty scope and conditions, the remaining pattern depth exceeds TWI, the new tire of the same specification will be covered free of charge.

What is not covered

1. Road hazard injuries or damages caused by obstacles or debris, such as cuts, punctures (whether repairable or not), snags, bruises, tears, abrasions or impact breaks.
2. Improper repairs or repairs that have failed.
3. Improper inflation or other maintenance abuses.
4. Improper mounting/dismounting.
5. Mechanical irregularities such as bent wheel assemblies, misalignment worn or faulty components.
6. Accident, corrosion, tire alteration, vandalism, fire, theft or damages cause by nature.
7. Damage from over-inflation or under-inflation, overloading, defective vehicle mechanical conditions.
8. Non-racing or off-road tires that are misused or abused for racing or off-road purposes.
9. Ozone or weather cracking or other abuse, misuse, tire alteration, run flat.
10. Tire which D.O.T identification number and/or brand name removed intentionally.
11. Tires that have been modified after leaving the factory, such as fillers, sealants, balancing substances and external tire treatments or materials of any kind. If the added material is the cause of a failure, a tire will not be accepted for warranty claim.
12. Abnormal tread wear resulting from improper installation, wheel misalignment, tire/wheel assembly imbalance, etc.
13. Vehicles or tires operated in excess of the rated Work Capacity Factor.
14. Additional monetary loss, such as damage of the vehicle or time, etc.

Road Hazard Warranty

If a tire is rendered unserviceable due to a non-repairable road hazard, it must meet following guidelines:

- Tire must be within one year from date of purchase. The tire purchase certificate must be provided.
- For qualifying tires, 50% of the claim will be given based on the total of the tire FOB price and freight. Calculation method: Compensation=(FOB+Freight)*50%

Treadwear Mileage Warranty

If an eligible tire evenly wears out before the warranty miles under the normal passenger use, and within the Limited Warranty time period, if the tire pattern is worn to TWI and does not reach the warranty mileage, the unused service will be subsidized on a pro-rata basis to purchase a new tire. To make a claim, installation record, tire rotation record, and the removal record must all be forwarded with the claimed tire.

- Tires must be rotated every 6,000 to 8,000 miles or less.
- This warranty is not applicable to original equipment tires.
- Treadwear Mileage Warranty only applies to the original purchaser/owner of the tires.
- Mileage Warranty does not apply to tires used in commercial applications, including, but not limited to: law enforcement, taxi services, courier services ect.
- Tires must be evenly worn, with a depth difference of less than 2/32nds across the tread.
- Mileage warranty product list:

NO.	Brand	Pattern	Mileage Warranty(miles)
1	ATLAS	Force UHP	50,000
2	ATLAS	Force HP	50,000
3	ATLAS	PARALLER 4X4 HP	55,000
4	ATLAS	PARALLER H/T	55,000
5	ATLAS	PARALLER A/T	55,000
6	ATLAS	PRIVA X/T	55,000
7	ATLAS	PRIVA R/T	50,000

90-DAY Customer Satisfaction Trial

LingLong offers a 90 Day Free Trial as the following :

- Applies Passenger Tires (Excluding tires for commercial and racing purposes, etc.), Light Truck tires not included.
- This satisfaction guarantee applies to the original purchaser who purchases at least four new passenger tires at one-time and not to the tires provided under this guarantee.
- Not applicable to tires that are intentionally damaged or damaged due to improper use.
- How do you return your tires during the trial period?
- Within the authorized time frame from the date of purchase, you must return your tires to the tire dealer where you purchased your tires.
- Present the original sales receipt and proof-of-purchase.
- Truthfully state reason for dissatisfaction (such as appearance, driving, etc.).

To make a claim under this limited warranty

1. Present your tires and the original purchase receipt to point of purchase or any the Company's dealer.
2. Complete and sign the Claim Adjustment form provided, keep a copy for your records and leave the tire with the dealer to process the warranty claim.

Owner's obligation

1. At the time of purchase, tires must be properly installed with recommended inflation and balanced. Observe rotation and alignment regularly according to recommendations.
2. Refer to any authorized the Company's dealer or point of purchase for adjustment claim.
3. Owner is responsible for service charges and applicable taxes.
4. Submit a copy of the original purchase receipt to support the adjustment claim.

Tire safety and maintenance

Tire failure can result in serious damage and/or personal injury. To reduce these risks we recommend the following:

1. Maintain proper inflation, do not under or over inflate. Always maintain inflation according to the vehicle manufacturer's or the Company's recommendations.
2. Wheel alignment and balancing should be checked at regular intervals.
3. Do not overload, refer to load carrying capacity information molded on tire sidewall.
4. Avoid spinning, driving over curbs, potholes, obstacles and edges of pavement.
5. Never drive with smooth(bald) tires. By law, tires must be replaced when worn to TWI (tread wear indicator).
6. Check your tires frequently for any damage such as scrapes, cuts, foreign objects, separations or bulges. If damaged replace it with spare and refer to an authorized dealer.
7. Do not drive in excess of permitted speed limits and beyond the maximum specified by tire.
8. To achieve proper wear and optimize tread life, rotate your tires at least every 6000 miles.

Exclusions, Limitations, and Legal Rights

No representative or dealer is authorized to make any representation, promise, or agreement on behalf of Linglong, except as expressly stated in this document. Any tire, regardless of construction quality, may fail in service or otherwise become unserviceable due to conditions beyond the manufacturer's control. This warranty does not constitute a representation that tire failure will not occur under any circumstances.

DISCLAIMER: This warranty is provided in lieu of all other warranties and representations, express or implied. Linglong expressly disclaims any and all implied warranties, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. No other warranty or representation of any kind shall be deemed to exist or arise by operation of law.

LIMITATION OF DAMAGES: Under no circumstances shall Linglong be liable for any indirect, special, incidental, consequential, or punitive damages, including but not limited to loss of profits, business interruption, loss of reputation or goodwill, or costs related to replacement transportation or other associated expenses. Certain states or provinces do not allow the exclusion or limitation of incidental or consequential damages; therefore, some portions of this limitation may not be enforceable in specific jurisdictions.

This warranty sets forth specific legal obligations, and additional rights may apply depending on the governing state or provincial law.

